

PAPR Reduction Techniques in Orthogonal Frequency Division Multiplexing (OFDM) -A Review

Mohammad Moin Ansari

*Department of Electronics and Communication Engineering
Gyan Ganga College of technology Jabalpur MP India*

Rajesh Parashar

*Department of Electronics and Communication Engineering
Gyan Ganga College of technology Jabalpur MP India*

Abstract- High Peak-to-Average Power Ratio (PAPR) is the one of the major drawback of the Orthogonal Frequency Division Multiplexing (OFDM) transmitted signal. Many techniques have been proposed to mitigate the PAPR problem. Except for the signal distortion techniques such as clipping, peak windowing and companding and so on. The redundancy based PAPR reduction techniques include selective mapping, partial transmit sequence, tone reservation, tone injection and coding etc information the undesired effects occurring to the distortion techniques can be alleviated with the penalty of the reduced transmission rates due to introduction of redundancy. In a turbo coded orthogonal frequency-division multiplexing (TCOFDM) system, low peak-to-average power ratio (PAPR) can be achieved by selective-mapping (SLM). OFDM consist of large number of independent subcarriers, as a result of which the amplitude of such a signal can have high peak values. The Selected Mapping (SLM) and turbo coding is one of the promising PAPR reduction techniques for OFDM. In a turbo coded orthogonal frequency-division multiplexing (TCOFDM) system, low peak-to-average power ratio (PAPR) can be achieved by selective-mapping (SLM).

I. INTRODUCTION

Much of the research focuses on the high efficient multicarrier transmission scheme based on "orthogonal frequency" carriers. In 1971 Weinstein and Ebert applied the discrete Fourier transform (DFT) to parallel data transmission systems as part of the modulation and demodulation process. The spectrum of the individual data of the sub channel. The OFDM signal, multiplexed in the individual spectra with a frequency spacing equal to the transmission speed of each subcarrier. The center frequency of each subcarrier, there is no crosstalk from other channels. Therefore, if we use DFT at the receiver and calculate correlation values with the center of frequency of each subcarrier we recover the transmitted data with no crosstalk. In addition, using the DFT-based multicarrier technique, frequency-division multiplex is achieved not by band-pass filtering but by baseband processing. Moreover, to eliminate the banks of subcarrier oscillators and coherent demodulators required by frequency-division multiplex, completely digital implementations could be built around special-purpose hardware performing the fast Fourier transform (FFT), which is an efficient implementation of the DFT. Recent advances in very-large-scale integration (VLSI) technology make high-speed, large-size FFT chips commercially affordable. Using this method, both transmitter and receiver are implemented using efficient FFT techniques that reduce the number of operations from N^2 in DFT down to $N \log N$. In the 1980s, OFDM was studied for high-speed modems, digital mobile communications, and high-density recording. One of the systems realized the OFDM techniques for multiplexed QAM using DFT and by using pilot tone, stabilizing carrier and clock frequency control and implementing trellis coding are also implemented. Moreover, various-speed modems were developed for telephone networks.

A well-known problem of the orthogonal frequency division multiplexing (OFDM) system is the possible Occurrence of high peak to average power ratio (PAPR). Many techniques have been proposed to mitigate the PAPR problem. Except for the signal distortion techniques such as clipping [2], peak windowing [3] and companding[4] redundancy is needed to control PAPR. The redundancy based PAPR reduction techniques include selective mapping [9], partial transmit sequence[10], tone reservation[11], tone injection[12] and coding[13] etc information The undesired effects occurring to the distortion techniques can be alleviated with the penalty of the reduced transmission rates due to introduction of redundancy. The basic idea of selective-mapping (SLM) technique is to generate several OFDM symbols as candidates and then select the one with the lowest PAPR for actual

transmission. Conventionally, the transmission of side information is needed so that the receiver can use the side information to tell which candidate is selected in the transmission and then recover the information a selective-mapping scheme for turbo coded OFDM which does not need information was proposed, which employs the discriminating characteristic of the interleave of the turbo coded system. Several distinct interleavers are used as candidates for the selection operations in the transmitter. The receiver uses the MAP decoder for the turbo code to calculate the reliability of each candidate. Although side information is not available, the reliability of the decoded results will be high and the receiver can recover the correct codeword in case that the interleaver chosen by the receiver is correct. In case that the interleaver is not the right one, the reliability of the decoded results will be very low and the receiver needs to try another interleaver. The price to pay is the increased decoding complexity. Moreover, there is room for improving the capability of PAPR reduction. The reason is that we note that varying interleavers of turbo encoder will only vary the parity bits of the second component convolutional code of the turbo codes. With this observation, in this thesis, we present two modified side-information-free selective mapping turbo coded OFDM schemes for which all the code bits of a whole turbo codeword may be varied so that the PAPR can be substantially reduced.

II. REDUCTION TECHNIQUES

1. SLM TECHNIQUE -

In selective mapping (SLM) technique the actual transmit signal lowest PAPR is selected from a set of sufficiently different signals which all represents the same information [8-10]. Selective Mapping (SLM) method is used for minimization of peak to average transmits power of multicarrier transmission system with selected mapping. In selective mapping (SLM) technique the signal having lowest PAPR is selected from a set of sufficiently different signals which all represents the same information [15]. Block diagram of SLM Technique is shown in figure 2.

Let the input data stream as a vector Each data block is multiplied by U different phase sequences, each of length N , $u = 1, 2, \dots, U$, resulting in U modified data blocks. To include the unmodified data block in the set of modified data blocks.

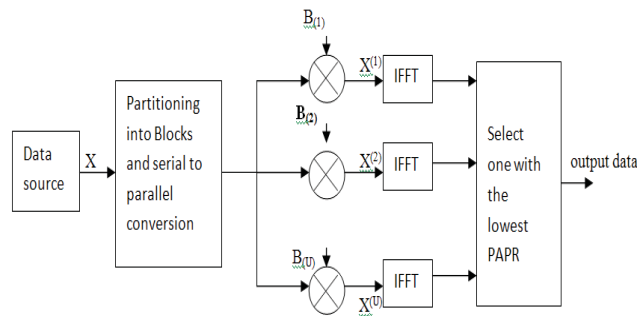


Fig. 1: Block Diagram of OFDM transmitter with the SLM Technique

The SLM algorithm can be described in following steps:

- Multiply the input data signal with U different phase sequences.
- Generate the OFDM signal for each signal (U signals).
- Select the OFDM signal with lowest PAPR.

The receiver has to know which sequence was used to generate the signal, so that it can recover the original data, and the used sequence can be transmitted as side information.

2. MODIFIED SLM TECHNIQUE USING

LINEAR BLOCK CODES-

When the error control coding and OFDM modulation process work together such system is called COFDM. In a COFDM system to add redundancy and code the bits prior to IFFT. The purpose of this step of taking adjacent bits in the source data and spreading them out across multiple subcarriers. One or more subcarriers may be lost or impaired due to a frequency null and this loss would cause a continuous stream of bit error. Such an error is a burst of errors would typically be hard to correct. The main purpose of the modified SLM technique is to reduce PAPR and IFFT

block. There is only one IFFT block at transmitter if the sequence which is the lowest PAPR can be found out by a decision algorithm before IFFT. [6]

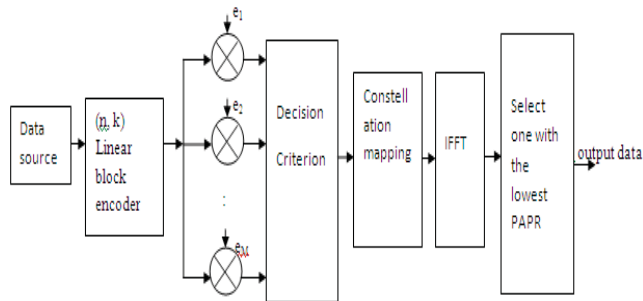


Fig. 2: Block Diagram of Modified SLM Technique

2.1 Algorithm for modified SLM Technique

- Step 1: A binary information source is divided into blocks of 4 bits.
- Step 2: Each information block is encoded into a codeword c by a $[7,4]$ hamming encoder.
- Step 3: A control bit added to codeword c to create an Extended hamming code of 8 bits.
- Step 4: Calculate the error table and coset leader, 16 in Number
- Step 5: Sixteen vectors are constructed as $c+e_1, c+e_2, c+e_3, \dots$ etc
- Step 6: For each scrambled codeword calculate the value of $Z = U^2 + V^2 + W^2$
- Step 7: Scrambled codeword with the minimum Z is Selected and then Transformed to OFDM signal by constellation mapping and IFFT.

2.2 LINEAR BLOCK CODES

Consider an $[n, k]$ Linear code C with parity-check matrix H , where n is the length and k is the dimension of C . Since $Hc^t = 0$ for any codeword $c \in C$, any vector $X \in c + e$ has the same syndrome as e , that is [2] $Hx^t = H(e + c)^t = He^t$ (5) A binary information sequence is divided into blocks of 4 bits. Each message block is encoded into a codeword C which is 7 bits by a $[7, 4]$ hamming encoder. Hamming codes were designed for correction [11]. The parameters for the family of binary hamming codes are typically expressed as a function of a single integer $m \geq 2$ (for $m=3$, we have a $(7, 4)$ Hamming code) not necessarily prime, it is any positive integer. A hamming code on $GF(2)$ has code length $n=2^m-1$, message length $k=2^m-1-m$, redundancy $n-k=m$ and error correcting capability $t=1$ bit.

2.3 HAMMING CODES

Hamming codes are only single error correcting. To improve the error detection and connection capability by adding parity check digit. The resulting code is called the extended binary hamming code. Suppose that c is a code over the alphabet $\{0, 1\}$. Let c_e be the code obtain by adding a single character to the end of each word in c in such a way that every word in c_e has even weight.

According to the formula $S = eH^T$, the syndromes which are corresponding to the non-error and one error patterns could be obtained. And other seven two errors patterns could be obtained from the other syndromes. So the standard array of c is constructed. The standard array an $[n, k]$ binary linear code C is a $M \times N$ array and for extended array an $[8, 4]$ for binary linear code c is also $M \times N$ array. where $M = 2m - K$, $N = 2K$.

At last sixteen vectors are constructed as $c + e_1$, $c + e_2$, ..., $c + e_{16}$, where $e_1 = 0$ and e_1, e_2, \dots, e_{16} are properly selected as the coset leaders of the standard array in terms of their PAPR. Then the Decision criterion is used to calculate the value of Z . Finally, the scrambled codeword with the minimum Z is selected and then transformed to an OFDM signal by constellation mapping and IFFT.

III. PTS TECHNIQUE

The PTS technique is a powerful PAPR reduction technique. The block diagram of the PTS scheme is shown in figure 1. In the PTS scheme, the input data X is partitioned into M disjoint sub-blocks. The sub-carriers in each sub-block are weighted by a phase factor for that sub-block. The phase factors are selected such that the PAPR of the combined signal is minimized. The input data X divided into M disjoint sub-blocks is all the sub-carriers position which are presented in other sub-blocks must be zero so that the sum of all the sub-blocks constitutes the original signal.

There are three sub-block partition techniques, namely adjacent partition, interleaved partition, and random partition. The random partition technique is the best choice for PAPR reduction, whereas the interleaved partition has the worst PAPR reduction performance.

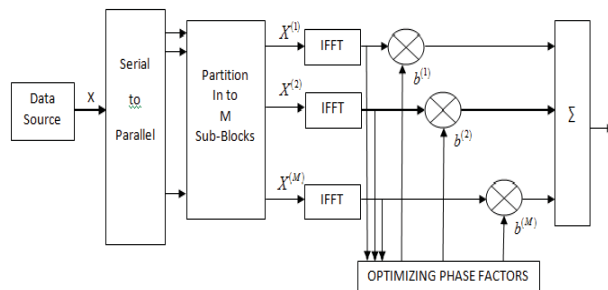


Fig. 3. The block diagram of PTS scheme

The PTS algorithm can be described in following steps:

- Divide the OFDM sub-carriers into M disjoint sub-blocks.
- Generate the OFDM signal for each sub-block by taking IFFT of each sub-block.
- Combine the M output OFDM signals with weighting factors b_i .
- The weighting factors are generated with some optimization algorithm.

The phase factors must then be transmitted as side information, resulting in some loss of efficiency. The receiver has to know the generation scheme in order to recover the data.

IV. PVIOUS DATA SET

Comparison of all work-

In 2015[1] author A.A.A. Wahab, S.Lih is worked on an improved SLM technique for PAPR reduction. Graphical analysis of the authors are shown in figure-

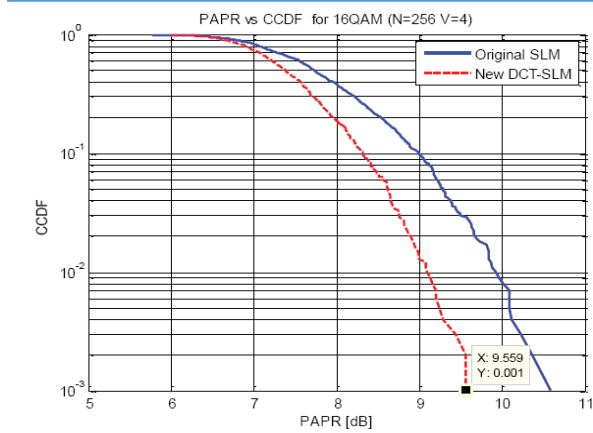


Fig. 4 PAPR vs CCDF for 16QAM

In 2014 [2], author proposed High peak-to-average power magnitude relation (PAPR) may be a major disadvantage of orthogonal frequency division multiplexing (OFDM) systems. In 2013[2], Communication is one in all the numerous features of existence. All the method through the innovation in era and its increasing burden, swift development has occurred among the communication field. In 2011 author worked on a new DSI-SLM method for PAPR reduction in OFDM system, state that the phase sequence and dummy sequences added to the signal improves the PAPR reduction in OFDM. Some detailed data are as follows-

No of subcarriers	Maximum (mean)	Threshold (mean)	Pre Clipping (mean)	Post Clipping (mean)	Difference in PAPR (mean)
64 bit	0.3869	0.3569	6.6001dB	5.9438dB	0.6563dB
128 bit	0.2906	0.2606	7.2339dB	6.3312dB	0.9027dB
256 bit	0.2167	0.1867	7.8739dB	6.6431dB	1.2308dB
512 bit	0.1623	0.1323	8.3095dB	6.5913dB	1.7182dB

Table-I Amplitude Clipping and filtering

Number of subcarriers	Before selected mapping(in dB)	After selected mapping for 10 different phase factors (in dB)				Least PAPR(in dB)	Difference in PAPR(in dB)
128 bit	8.2523	6.8263	6.6507	5.7969	6.4039	5.7969	2.4554
256 bit	9.2302	7.1372	7.0144	7.2261	6.0144	6.0144	3.2158
512 bit	9.8081	6.1220	7.0295	6.8035	7.1003	6.1220	3.6861

Table-II Selected Mapping

V. CONCLUSION

OFDM is a very attractive technique for multicarrier transmission and has become one of the standard choices for high speed data transmission over a communication channel. It has various advantages: but also has one major drawback: it has a very high PAPR. In this project, the different properties of an OFDM System are analysed and the advantages and disadvantages of this system are understood. Results of simulation of modified SLM technique show

that the PAPR reduction of OFDM system, which further results in high-performance of wireless communication. With the rising demand for efficient frequency spectrum utilization, OFDM proves invaluable to next generation communication system.

REFERENCES

- [1] A. A. A. Wahab, S. Lih, An Improved SLM Technique For PAPR Reduction In OFDM Systems, Proceeding of IC-ITS 2015 e-ISBN:978-967-0850-07-8 International Conference on Information Technology & Society 8-9 June 2015, Kuala Lumpur, MALAYSIA.
- [2] Meixia Hu, Yongzhao Li, Yi Liu, Hailin Zhang, Parameter-adjustable piecewise exponential Companding scheme for peak-to-average power ratio reduction in orthogonal frequency division multiplexing systems, Published in IET Communications, Received on 21st March 2014,
doi: 10.1049/iet-com.2013.0226
- [3] N.R.Raajan, s.prabha, D.meenakshi, Improved Performance In OFDM Systems By PAPR Reduction Techniques, 2013 International Conference on Computer Communication and Informatics (ICCCI -2013), Jan. 04 - 06,2013, Coimbatore, INDIA
- [4] Bahubali K. Shiragapur, Udai Wali, Novel Techniques to reduce PAPR in OFDM Systems Using Threshold SLM, 978-1-4673-4529-3/12/\$31.00_c 2012 IEEE.
- [5] S. Mohammady, R. M. Sidek, P. Varahram, M. N. Hamidon, and N. Sulaiman, A new DSI-SLM method for PA_P R reduction in OFDM systems, 2011 IEEE International Conference on Consumer Electronics (ICCE).
- [6] Ms. V. B. Malode1, PAPR Reduction Using Modified Selective Mapping Technique Int. advance Networking and Applications 626 Volume: 02, Issue: 02, Pages: 626-630 (2010)
- [7] Yung-Chih Tsai, Student Member, IEEE, Shang-Kang Deng, Student Member, IEEE, Kuan-Cheng Chen and Mao-Chao Lin, Member, IEEE, Turbo Coded OFDM for Reducing PAPR and Error Rates, IEEE TRANSACTIONS ON WIRELESS COMMUNICATIONS, vol. 7, no. 1, January 2008
- [8] Sang-Woo Kim, Jin_Kwan Kim and Heung-Gyoonyu., A computational complexity Reduction scheme using Walsh Hadamrd sequence in SLM method., IEE 2006, pp. 762-766
- [9] Yang Jie, Chen Lei, Liu Quan and Chan De, .A Modified selected mapping technique to reduce the Peak to Average Power Ratio of OFDM signal., IEEE transaction on consumer Electronics, Vol53, No.3,pp.846-851, August 2007
- [10] Dae-Woon Lim, Seok-JoongHeo," A New PTS OFDM Scheme with Low Complexity for PAPR Reduction," IEEE transactions on broadcasting, vol. 52, no. 1, pp. 166-169, march2006.
- [11] SeungHee Han and Jae Hong Lee, .Modified selected Mapping Technique for PAPR reduction of coded OFDM signal, IEEE Transaction on broadcasting, Vol.50, No.3,pp.335-341, Sept.2004
- [12] Abdulla A. Adouda, .PAPR Reduction of OFDM signal using Turbo coding and Selective Mapping, Proceedings of 6th Nordic signal processing.
- [13] C. Berrou, A. Glavieux, and P. Thitimajshima. Near Shannon limit error correcting coding and decoding: Turbo codes. In Proceedings of the IEEE International Conference on Communications, Geneva, Switzerland, May 2003.
- [14] Carson, N. and Gulliver, A., "Peak-to-average power ratio reduction of OFDM using repeat-accumulate codes and selective mapping" Proc. ISIT 2002, p. 214, July 2002
- [15] A. D. S. Jayalath and C. Tellambura, "The use of interleaving to reduce the peak-to-average power ratio of an OFDM signal," Proc. IEEE GLOBECOM, Nov. 2000, vol. 1, pp. 82–8676.
- [16] Marco Breiling, Stefan H. Muller-Weinfurtner and JohannesB.Huber. SLM Peak-Power Reduction without Explicit Side Information., IEEE Communications Letters, VOL.5, No.6, pp.239-241, JUNE 2001.
- [17] J. Tellado, Multicarrier Modulation with Low (PAR)-Applications to DSL and Wireless. Norwell, MA: Kluwer Academic Publishers, 2000.
- [18] Takeshita, O.Y., Costello, D.J., Jr., "New deterministic interleaver designs for turbo codes," Information Theory, IEEE Transactions on, vol. 46, no. 6, pp. 1988–2006,September 2000.
- [19] A. D. S. Jayalath and C. Tellambura, "Adaptive PTS approach for reduction ofpeak-to-average power ratio of OFDM signal," Electronic Lett., vol. 36, no. 14, pp.1226-1228, July 2000.
- [20] RudraPratap. "MATLAB PROGRAMMING", 2nd edition.