

# Experimental Study of Wet Ethanol Impact on Performance and Exhaust Gas Emissions of Gasoline Engine with EGR System

Mohammad Arief Alfi Ardian<sup>1</sup>, Syaiful<sup>2</sup>, Nazaruddin Sinaga<sup>3</sup>  
<sup>1,2,3</sup>*Mechanical Engineering Department, Diponegoro University, Semarang, Indonesia*

**Abstract-** The increasing number of gasoline engines as a mode of transportation has an impact on increasing the consumption of gasoline fuel, which is becoming increasingly depleted and rising air pollution, especially in urban areas. To overcome this problem, ethanol as an alternative fuel was blended with gasoline in this study. Therefore, this study is intended to investigate the performance and exhaust emissions of gasoline engine fueled by gasoline and wet ethanol applying the exhaust gas recirculation (EGR) system. Wet ethanol was used as an alternative fuel because the price is competitive with gasoline. The percentage of wet ethanol blended into gasoline was in the range of 5% to 15%. This experiment was carried out at engine speed variations of 2500 rpm to 4000 rpm at intervals of 500 rpm. The results of this experiment illustrate that blending 15% wet ethanol into gasoline without EGR produces an increase of 11.74% torque, 11.73% brake power, and brake specific fuel consumption (BSFC) of 3.80%, exhaust gas temperature of 4.1%, and 38.7% thermal efficiency than that of P100. Addition of 10% wet ethanol into gasoline fuel reduces 41.1% CO and 44.30% HC emissions. Meanwhile, the use of cold EGR with the addition of 10% wet ethanol increases CO<sub>2</sub> emissions by 28.1% and decreases O<sub>2</sub> by 7.5%.

**Keywords –** Wet ethanol, Gasoline engine, EGR, Engine performance, Exhaust gas emission

## I. INTRODUCTION

The increase in the number of gasoline engines causes an increase in gasoline fuel consumption, which has an impact on rising fuel prices because supplies are running low. Besides, an increase in the number of gasoline engine vehicles exacerbates air quality due to hazardous substances from vehicle exhaust gases. To overcome this problem, the use of alternative renewable fuels is a concern in the present. Ethanol with octane values and high oxygen levels is one alternative fuel that can replace gasoline fuel [12]. High octane value increases the performance of the gasoline engine [1]. The high octane value in ethanol results in better combustion causing the increase of engine power and torque [6,7]. On the other, the addition of ethanol causes a decrease in HC and CO emissions. This is because of the high oxygen content in ethanol results in better combustion efficiency [10]. Previous research was also conducted by Prakar Chansauria (2018) [26]. Addition of 10% ethanol into gasoline fuels results in a decrease in CO emissions of 60%. Other research in results shows that the use of exhaust gas recirculation (EGR) can improve engine performance [12]. However, the use of EGR increases the concentration of HC and CO [9]. The reason is that the low oxygen concentration in the combustion chamber rises HC and CO [13]. Cinzia Tornatore (2019) also states that EGR can increase HC and CO emissions [25].

Based on previous studies, research on the use of wet ethanol as a mixture of fuel in gasoline engine with the EGR system has never been performed. Therefore, this study tries to investigate the effect of wet ethanol as a mixture of gasoline engine with the EGR system. In this experimental study, hot EGR and cold EGR were applied to direct injection gasoline engine with variations in the percentage of wet ethanol. The wet ethanol effect with or without hot /cold EGR on the performance of the gasoline engine and exhaust emissions is analyzed.

## II. EXPERIMENTAL SET-UP


The fuel used in this study is gasoline and wet ethanol. Gasoline fuel was produced by PT. Pertamina, Tbk. Wet ethanol was obtained from the chemical store, Semarang, Indonesia. The percentage of the volume of wet ethanol blend into the fuel was 5% to 15% of the total volume of the mixture. Gasoline engine performance and emissions were analyzed in various fuel blend percentages. Some terms of fuel blends are given to facilitate analysis. P100 is pure gasoline, WE5 is a mixed fuel with a composition of 5% wet ethanol and the gasoline is a balance. The fuel blend was put into a mixer, then flows into the gasoline engine due to the work of the fuel pump. Fuel consumption was measured by monitoring the fuel flow rate at a constant level of a buret. In order to measure the torque of a gasoline engine, a dynamometer (DYNOMite Land & Sea type water brake dynamometer and accuracy of  $\pm 0.3$  Nm) was installed in-line with the engine shaft. A gas analyzer (stargass 898 with an accuracy of 0.926711) was used to monitor gas engine exhaust emissions.

Table -1 Fuel Properties

Properties	Wet-Ethanol	Bensin
Octane Number	109	88.8
Water Content (%v)	>5.0	0.003
Viscosity	1.623	0.22
Density Temperature 15°C(kg/m <sup>3</sup> )	0.8974	744
Number Value (MJ/kg)	21.73	42.69
Flash Point (°C)	24	7.22
Laten Heat (KJ/Kg)	1139	328.91

Table -2 Engine Specifications

Engine Toyota Kijang 7K	
Engine Type	Gasoline engine
Production	Toyota
Number of Cylinders	4 Straight
Engine Capacity	1781 cc
Valve	(SOHC) 8 valve
Maximum Power	94 hp - 5000 rpm
Maximum Torque	155 Nm – 3200 rpm
Fuel System	EFI

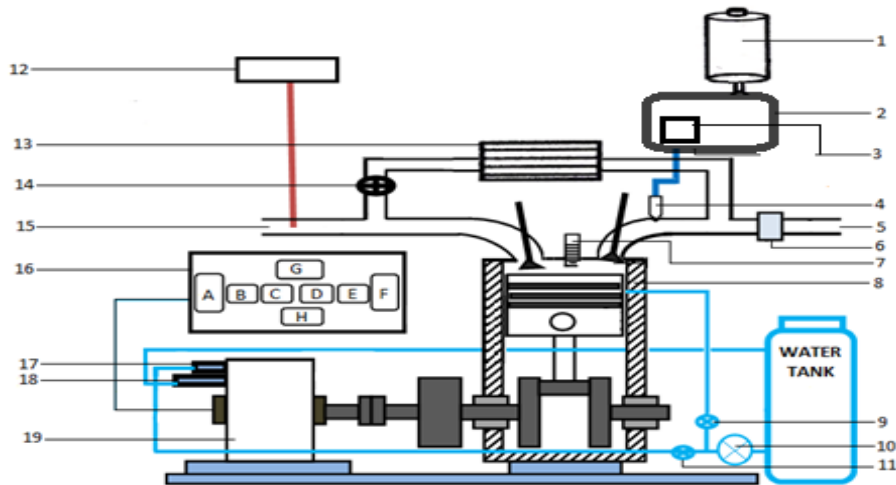

Experimental set-up

A. Manometer of air intake manifold	10. Cooling water valve	1. Fuel mixer
B. T <sub>2</sub> Temperature (EGR inlet)	11. Water pump	2. Burret
C. T <sub>3</sub> Temperature (EGR outlet)	12. Load valve	3. Fuel tank
D. T <sub>4</sub> Temperature (mixed air)	13. Dynamometer	4. Fuel pump
E. T <sub>5</sub> Temperature (engine)	14. Outlet water	5. Intake manifold
F. Air manometer includes EGR	15. Inlet water	6. Air flow sensor
G. Display load engine	16. Display panel	7. Spark plug
H. Speedometer	17. Exhaust	8. Gasoline engine
	18. Gas analyzer	9. Cylinder block

Mixer (1) was used to mix wet ethanol with gasoline to get a homogeneous fuel blend. The mixer was placed higher than the engine so that the fuel blend flows into the engine based on the principle of gravity and is also assisted by a fuel pump (2). A burret was used to measure fuel consumption, in which the time of fuel consumption was determined for every 90 ml of fuel consumption (3). After that, the fuel was pumped into the injector (4). A dynamometer was applied to measure the torque produced by a gasoline engine. Loading was carried out by flowing water into the dynamometer at a constant rate. The load given to the engine was 25% of the load capacity that can be

achieved by the engine. Pump (10) pushes water from the water tank into the dynamometer for loading. The torque read by the sensor on the dynamometer was displayed on the load display (G). Temperature measurement using a thermocouple was mounted on the exhaust manifold, EGR inlet, EGR outlet and in the intake manifold and engine block. The temperature measurement results were displayed on the thermocouple display (B-C-D-E). Exhaust gas emissions were measured using a gas analyzer (18).

### III. RESULTS AND DISCUSSION

#### 3.1. Engine Performance Analysis

##### 3.1.1 Brake Torque

Figure 2 demonstrates the value of the brake torque for various blend fuels with variations in engine speed. The addition of wet ethanol into gasoline fuels produces an increase in torque in each fuel blends. The highest increase in engine torque is observed in the WE15 blend. Engine torque using gasoline is found at 88.75 Nm at 4000 rpm. In the WE15 blend, the torque produced reaches 99.17 Nm at 4000 rpm. The highest torque increase of 11.74% is found at the engine speed of 4000 rpm with WE15 fuel in the cold EGR system. Increased oxygen levels in the combustion chamber are affected by oxygen levels in wet ethanol [11]. Oxygen content is higher in the molecular structure, causing more chemical energy to be released due to the combustion of fuel that is converted to thermal energy, so that torque and engine power increase [14]. The same research was also carried out by M.N.A.M. Yusoff (2018) [10]. The amount of oxygen content in the fuel mixture results in complete combustion causing an increase in engine torque.

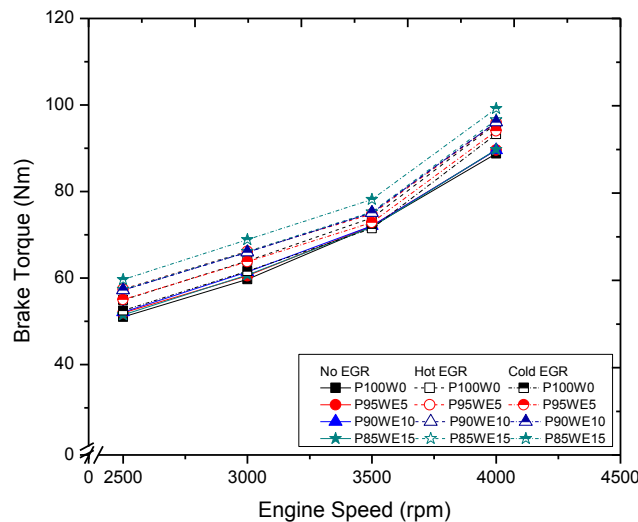


Figure 2. Brake torque for various fuel blends with or without EGR at variations in engine speed.

##### 3.1.2 Brake Power

Figure 3 demonstrates the value of brake power for various fuels with variations in engine speed. Brake power with WE15 fuel reaches 41.52 kW of which brake power with pure gasoline reaches 37.16 kW at 4000 rpm engine speed. This result informs that the addition of wet ethanol can increase brake power to 11.73%. The highest engine brake power increase is observed in the WE15 mixture. Brake power for WE15 blend without EGR is 37,558 kW. While brake power with hot EGR in the WE15 blend is 40.437 kW. Brake power with cold EGR WE15 blend is 41,520 kW at 4000 rpm engine speed. Increased oxygen levels and octane values in the combustion chamber cause complete combustion, increasing brake power [14]. Oxygen content is higher in the molecular structure, creating more chemical energy to be released due to the burning of fuel that is converted to thermal energy, so that torque and brake power increase [5]. The same research was also carried out by Ashraf Elfakhany, (2018) and M.N.A.M. Yusoff, (2018) [5, 10]. The high octane value in ethanol results in better combustion, which results in increased engine power and power.

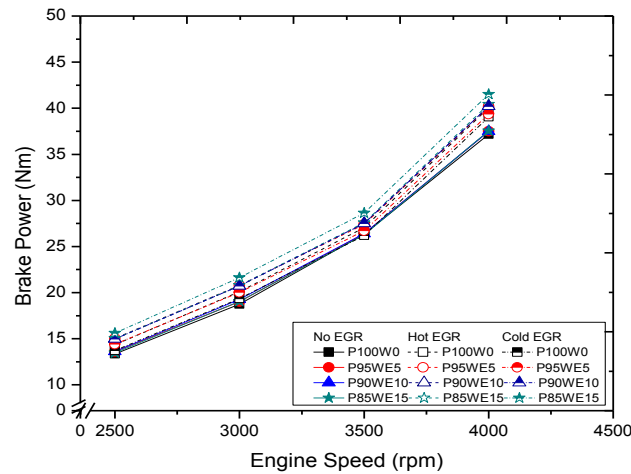


Figure 3. Brake power for various fuel blends with or without EGR at variations in engine speed.

### 3.1.3 BSFC (Specific Brake Fuel Consumption)

Figure 4 demonstrates the BSFC value for various fuels with variations in engine speed. The highest BSFC reduction of 3.80% is found in the blended of WE5 with 2500 rpm engine speed. This is due to a lower heating value than that of gasoline. The low calorific value does not contribute to heat energy during combustion in the cylinder [6]. The low energy content of a blend of wet ethanol and gasoline causes an increase in BSFC [27]. The energy content and heat value of ethanol/methanol which is lower than gasoline cause an increase in fuel consumption compared to using gasoline [15]. Zhijin Zhang, et al. (2014) revealed that the use of EGR can reduce BSFC and emissions [16]. 18.9% decrease of BSFC in the use of hot EGR is found in the P85WE15 fuel with 2500 rpm engine speed. BSFC reduction using hot EGR is higher than that from cold EGR. This is because hot EGR increases the intake temperature causing the increase of the combustion duration resulting in lower fuel consumption than EGR cold, eventually [8].

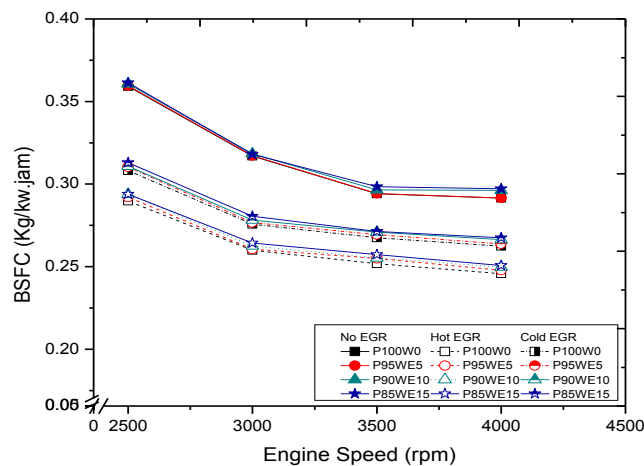


Figure 4. BSFC for various fuel blends with or without EGR at variations in engine speed.

### 3.1.4 Equivalence Ratio

Figure 5 shows the equivalence ratio value for various fuels with variations in engine speed. The addition of wet ethanol to gasoline fuel reduces the equivalence ratio of 11.47%. Decreasing the equivalence ratio caused by the high percentage of oxygen on wet ethanol results in a better combustion process in the combustion chamber [22]. This increase in oxygen percentage results in a decrease in the air-fuel ratio. The use of EGR on gasoline engines

decreases the equivalence ratio due to the presence of unburned fuel in the circulating exhaust gas into the combustion chamber [12]. By installing EGR, the equivalence ratio decreases to 9.5% from those without EGR with WE15 fuel at 4000 rpm engine speed.

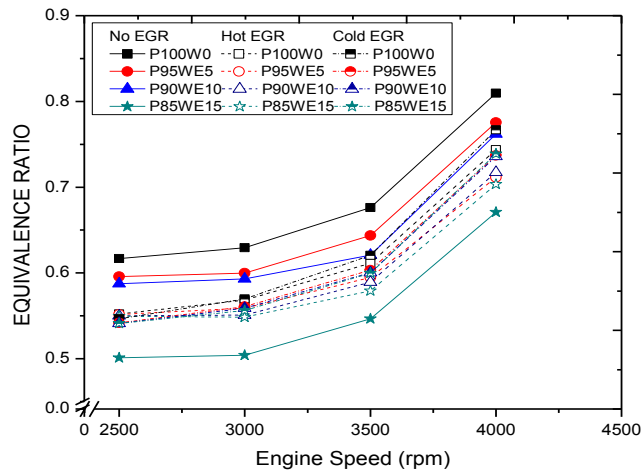


Figure 5. Equivalence ratio for various fuel blends with or without EGR at variations in engine speed.

### 3.1.5 Brake Thermal Efficiency (BTE)

Figure 6 shows the value of thermal efficiency for various fuels with variations in engine speed. The addition of wet ethanol to gasoline fuels increases thermal efficiency. The highest thermal efficiency increase of 2.85% is found at 4000 rpm engine speed with WE15 fuel in the cold EGR system. The high percentage of oxygen on wet ethanol increases thermal efficiency [23]. Increased thermal efficiency is caused by hot gas in the intake manifold due to EGR [19].

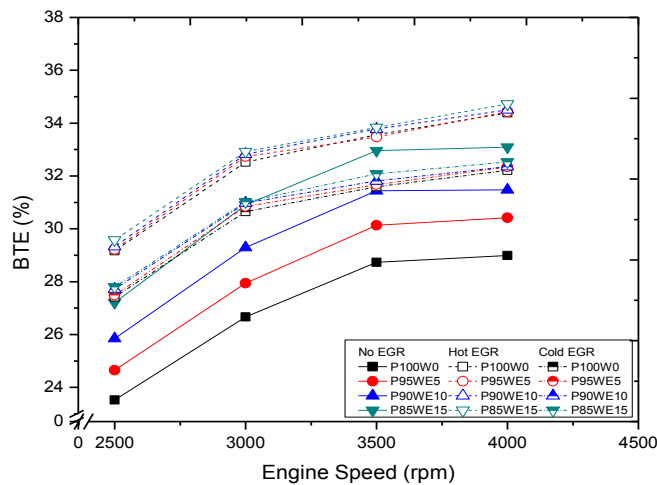


Figure 6. Brake thermal efficiency (BTE) for various fuel blends with or without EGR at variations in engine speed.

### 3.1.6 Volumetric Efficiency

Figure 7 shows the value of volumetric efficiency for various fuels with variations in engine speed. The highest increase in volumetric efficiency of 6.13% is found in the WE15 blend with an engine speed of 4000 rpm. Volumetric efficiency increases are caused by high latent evaporation heat on ethanol [24, 25]. The use of EGR decreases volumetric efficiency because EGR reduces the amount of fresh air entering the combustion chamber. This is because some of the air entering the combustion chamber is replaced by exhaust gas [28]. In addition, the use of the EGR system recirculates exhaust gases with high temperatures into the intake, so that volumetric efficiency

decreases [2]. The use of cold EGR reduces volumetric efficiency by 4.07% with WE5 fuel at 2500 rpm engine speed.

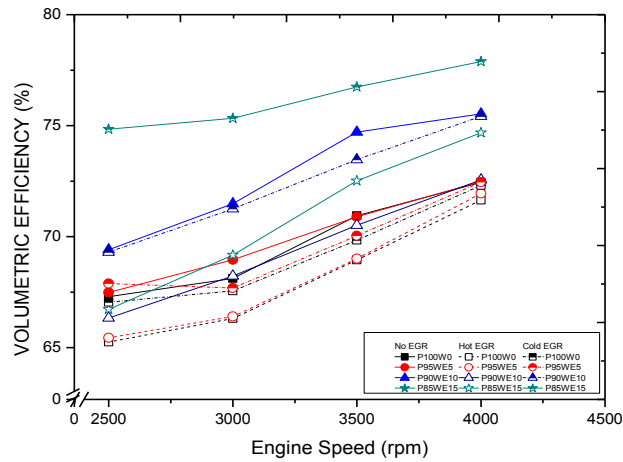


Figure 7. Volumetric efficiency for various fuel blends with or without EGR at variations in engine speed.

### 3.1.7 Exhaust gas temperature.

Figure 8 illustrates the EGT value for various fuels with variations in engine speed. The highest EGT increase of 4.1% is observed in the addition of 10% wet ethanol with 4000 rpm engine speed. The increase in oxygen percentage in ethanol causes more complete combustion so that the cylinder temperature increases [5]. The use of EGR decreases the combustion temperature because of the presence of exhaust gas which is recirculated into the engine [3]. The use of EGR causes the combustion temperature to decrease because the amount of oxygen circulated into the combustion chamber decreases [28]. The use of cold EGR is effective in reducing EGT rather than hot EGR. The highest decrease in EGT of 4.5% by using cold EGR is obtained by adding 10% wet ethanol with 4000 rpm engine speed.

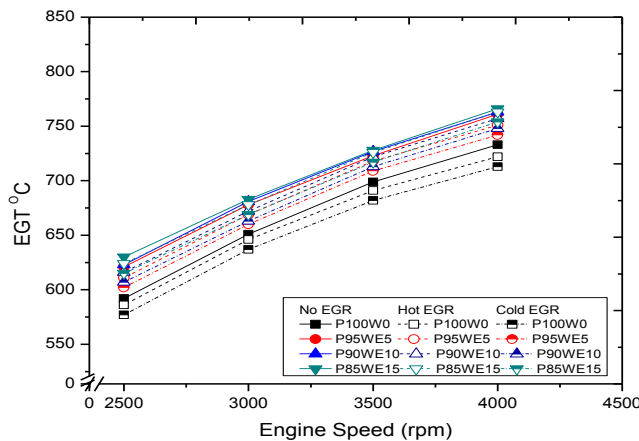


Figure 8. Exhaust gas temperature for various fuel blends with or without EGR at variations in engine speed.

## 3.2. Exhaust Gas Emission Analysis

### 3.2.1 Emissions of carbon monoxide (CO)

Figure 9 shows CO concentrations for various fuels with variations in engine speed. CO emissions experienced the highest decline of 41.1% with 15% ethanol at 4000 rpm engine speed. CO emission reduction is caused by a high percentage of oxygen in ethanol yielding a decrease of CO emissions [23]. Besides, high ethanol flame speed makes combustion in the cylinder more perfect so that the addition of ethanol can reduce CO emissions [10]. The use of EGR slightly increases CO emissions due to the presence of exhaust gas, which replaces the fresh air entering the

combustion chamber, making the mixture of heterogeneous fuels. The heterogeneous mixture causes imperfect combustion process, which increases CO values [16]. The use of cold EGR increases CO 75.4% emissions with WE15 fuel at the engine speed of 4000 rpm.

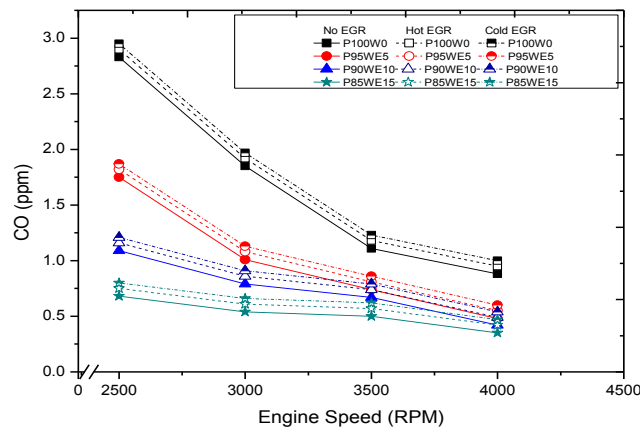


Figure 9. CO concentration for various fuel blends with or without EGR at variations in engine speed.

### 3.2.2 Emissions of Hydrocarbons (HC)

Figure 10 illustrates the concentration of HC for various fuels with variations in engine speed. HC emission has the highest decrease of 35.44% with 15% ethanol at a 4000 rpm engine speed. Decreasing HC emissions is caused by high oxygen concentrations in ethanol, which results in complete combustion yielding the decrease of HC emission [10, 23]. However, the use of EGR increases HC and CO emissions due to the reduction in oxygen concentration in the combustion chamber [9, 26]. The use of cold EGR increases 44.30% HC emission with WE15 fuel at 4000 rpm.

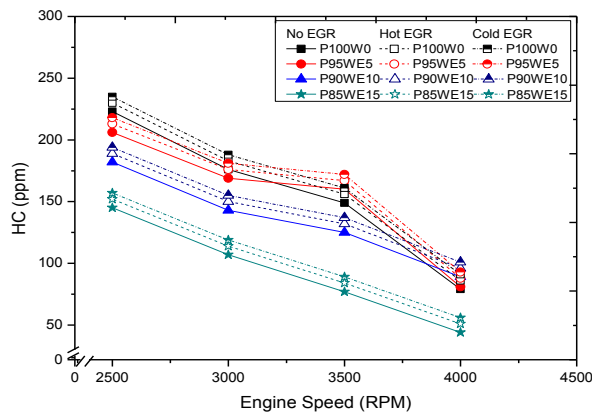


Figure 10. CO concentration for various fuel blends with or without EGR at variations in engine speed.

### 3.2.3 Emissions of Carbon Dioxide (CO<sub>2</sub>)

Figure 11 shows the value of CO<sub>2</sub> levels for various fuels with variations in engine speed. CO<sub>2</sub> emissions experienced the highest increase of 11.82% with 5% ethanol at an engine speed of 3500 rpm. The high percentage of oxygen in ethanol reacts with carbon atoms during the combustion process causing the increase of the formation of CO<sub>2</sub> [22]. The high value of CO<sub>2</sub> in the exhaust gas indicates that the combustion process in the combustion chamber is better. The use of EGR increases CO<sub>2</sub> emissions because some of the air entering the combustion chamber is replaced by exhaust gas in the form of CO<sub>2</sub> and H<sub>2</sub>O from the combustion results [19]. This condition causes an increase in CO<sub>2</sub> emissions. The use of cold EGR increases CO<sub>2</sub> emissions by 28.1% with WE5 fuel at an engine speed of 3500 rpm.

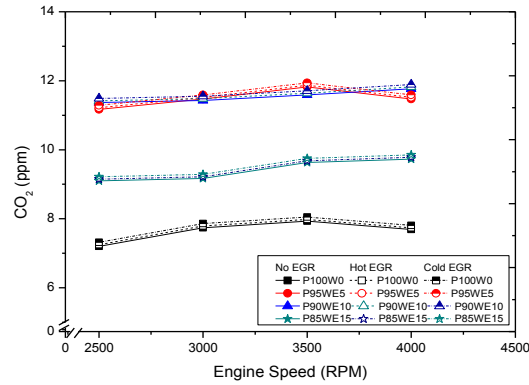


Figure 11. CO<sub>2</sub> concentration for various fuel blends with or without EGR at variations in engine speed.

### 3.2.4 Emissions of Oxygen (O<sub>2</sub>)

Figure 12 describes the value of O<sub>2</sub> levels for various fuels with variations in engine speed with or without EGR. The O<sub>2</sub> concentration has the highest increase of 74.04% with 5% ethanol at 2500 rpm engine speed. Increased O<sub>2</sub> level is caused by the presence of oxygen in ethanol which results in complete combustion [10]. The use of EGR on the gasoline engine causes some O<sub>2</sub> in the cylinder to be replaced by exhaust gas [2]. The exhaust gas circulation in the EGR decreases the O<sub>2</sub> concentration in the cylinder so that it causes the combustion temperature to decrease [8]. The use of cold EGR reduces the highest O<sub>2</sub> concentration by 44.8% with WE15 fuel at 4000 rpm engine speed.

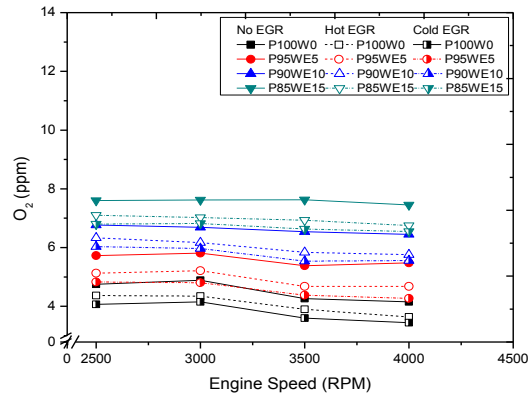


Figure 12. O<sub>2</sub> concentration for various fuel blends with or without EGR at variations in engine speed.

## IV. CONCLUSION

Experiment to determine the performance and exhaust emissions of gasoline engines with gasoline and wet ethanol blends have been carried out. Some of the results of experimental study can be summarized as follows:

1. From the experimental results, it was found that torque and power were increased by 11.74% with 15% wet ethanol at 4000 rpm engine speed by using cold EGR.
2. The increase of BSFC of 3.80% was found at 2500 rpm engine speed with 15% wet ethanol fuel while the use of hot EGR reduced BSFC to 18.9% from those without EGR.
3. The addition of wet ethanol to fuel and the use of hot EGR can reduce the highest equivalence ratio of 11.47% from those without EGR with WE15 fuel at 4000 rpm engine speed.
4. BTE increased 22.85% at 4000 rpm engine speed with WE15 fuel.
5. Volumetric efficiency has decreased to 4.07% and reduced EGT to 4.5% by using cold EGR.
6. From the results of this experiment, it was also found that the use of cold EGR increased CO emissions by 75.4% and emissions of HC 44.30% from those without EGR. CO<sub>2</sub> emissions increased to 28.1% while the O<sub>2</sub> concentration was reduced to 44.8% due to the use of cold EGR.



## V. ACKNOWLEDGMENT

The author would like to thank the entire Thermofluid Laboratory team, which is one of the laboratories owned by the undip Mechanical Engineering Departement. This Laboratory examines the phenomena that occur in the existing machining process and machine performance testing, especially in the field of Energy Conversion.

## VI. REFERENCE

- [1] Anderson, J. E., DiCicco, D. M., Ginder, J. M., Kramer, U., Leone, T. G., Raney-Pablo, H. E., & Wallington, T. J., 2012, "High octane number ethanol-gasoline blends: Quantifying the potential benefits in the United States", *Fuel* 97, pp. 585-594.
- [2] Haiqiao Wei, Tianyu Zhu, Gequn Shu, Linlin Tan, Yuesen Wang., 2012, "Gasoline engine exhaust gas recirculation – A review", *Applied Energy* 99, pp. 534-544.
- [3] Jianqin Fu, Banglin Deng, Jingping Liu, Linjun Wang, Zhengxing Xu, Jing Yang, Gequn Shu, 2014, "Study of SI engine fueled with methanol vapor and dissociation gas based on exhaust heat dissociating methanol", *Energy Conversion and Management* 79, pp. 213-223.
- [4] Mustafa Kemal Balki, Cenk Sayin., 2014, "The effect of compression ratio on the performance, emissions and combustion of an SI (spark ignition) engine fueled with pure ethanol, methanol and unleaded gasoline", *Energy* 71, pp. 194-201.
- [5] Elfasakhany, Ashraf, 2016, "Engine Performance Evaluation and Pollutant Emissions Analysis Using Ternary Bio-Ethanol-iso-Butanol-gasoline Blends in Gasoline Engines", *Journal of Cleaner Production* 139, pp. 1057-67.
- [6] Iliev, Simeon, 2015, "A comparison of Ethanol and Methanol Blending with Gasoline Using a 1-D Engine Model", *Procedia Engineering* 100, pp. 1013-1022.
- [7] Ashraf Elfasakhany, "Exhaust emissions and performance of ternary isobutanol- bio-methanol-gasoline and n-butanol-bio-ethanol-gasoline fuel blends in spark-ignition engines: assessment and comparison", *Energy* (2018), doi: 10.1016/j.energy.2018.05.120.
- [8] Fangxi Xie, Wei Hong, Yan Su, Miaomiao Zhang, Beiping Jiang., 2017, "Effect of external hot EGR dilution on combustion, performance and particulate emissions of a GDI engine", *Energy Conversion and Management* 142, pp. 69-81.
- [9] D. Damodharan, A.P. Sathiyagnanam, D. Rana, B. Rajesh Kumar, S. Saravanan., 2018, "Combined influence of injection timing and EGR on combustion, performance and emissions of DI diesel engine fueled with neat waste plastic oil", *Energy Conversion and Management* 161, pp. 294-305.
- [10] M.N.A.M. Yusoff, N.W.M. Zulkifli, H.H. Masjuki, M.H. Harith, A.Z. Syahir, L.S. Khuong, M.S.M. Zaharin, Abdullah Alabdulkarem, "Comparative Assessment of Ethanol and Isobutanol Addition in Gasoline on Engine Performance and Exhaust Emissions", *Journal of Cleaner Production* (2018), doi: 10.1016/j.jclepro.2018.04.183.
- [11] E. Galloni, F. Scala, G. Fontana., 2019, "Influence of fuel bio-alcohol content on the performance of a turbocharged, PFI, spark-ignition engine", *Energy* 170, pp. 85-92.
- [12] S. Verma, L.M. Das, S.C. Kaushik, S.S. B., "The effects of compression ratio and EGR on the performance and emission characteristics of diesel-biogas dual fuel engine, *Applied Thermal Engineering*" (2019),doi: <https://doi.org/10.1016/j.applthermaleng.2019.01.080>.
- [13] Mahsa Amirabedi, Samad Jafarmadar, Shahram Khalilarya., 2019, "Experimental investigation the effect of Mn2O3 nanoparticle on the performance and emission of SI gasoline fueled with mixture of ethanol and gasoline", *Applied Thermal Engineering* 149, pp. 512-519.
- [14] Battal Dog˘an, Dervis Erol, Hayri Yaman, Evren Kodanli., 2017, "The effect of ethanol-gasoline blends on performance and exhaust emissions of a spark ignition engine through exergy analysis", *Applied Thermal Engineering* 120, pp. 433-443.
- [15] Lennox Siwale, Lukacs Kristof, Akos Bereczky, Makame Mbarawa, Andrei Kolennikov., 2014, "Performance, combustion and emission characteristic of n-butanol additive in methanol blend fired in a naturally-aspirated spark ignition engine", *Fuel Processing Technology* 118, pp. 318-326.
- [16] Zhijin Zhang, Haiyan Zhang, Tianyou Wang, Ming Jia., 2014, "Effect of tumble combined with EGR (exhaust gas recirculation) on the combustion and emissions in a spark ignition engine at part loads", *Energy* 65, pp. 18-24.
- [17] C. Hergueta, M. Bogarra, A. Tsolakis, K. Essa, J.M. Herreros., 2017, "Butanol-gasoline blend and exhaust gas recirculation, impact on GDI engine emissions", *Fuel* 208, pp. 662-672.
- [18] Fang-Xi Xie, Xiao-Ping Li, Xin-Chao Wang, Yan Su, Wei Hong., 2013, "Research on using EGR and ignition timing to control load of a spark-ignition engine fueled with methanol", *Applied Thermal Engineering* 50, pp. 1084-1091.
- [19] Deepak Agarwal, Shrawan Kumar Singh, Aviansyah Kumar Agarwal, 2011, "Effect of Exhaust Gas Recirculation (EGR) on performance, emissions, deposits and durability of a constant speed compression ignition engine", *Applied Energy* 88, pp. 2900-2907.
- [20] Haozhong Huang, Zhongju Li, Wenwen Teng, Rong Huang, Qingsheng Liu, Yaodong Wang, 2018, "Effect of EGR rate on combustion and emission characteristics in a diesel engine with n-butanol/PODE3-4/diesel blend", *Applied Thermal engineering*.
- [21] Li, Y., Chen, Y., Wu, G., Chia-fon, F.L. and Liu, J., 2018, Experimental comparison of acetone-n-butanol-ethanol (ABE) and isopropanol-n-butanol-ethanol (IBE) as fuel candidate in spark-ignition engine, *Applied Thermal Engineering* 133, pp.179-187.
- [22] M.S.M. Zaharin, N.R. Abdullah, H.H. Masjuki, O.M. Ali, G Najafi, T. Yusaf, 2018, "Evaluation on physicochemical properties of iso-butanol additive in ethanol-gasoline blend on performance and emission characteristics of a spark-ignition engine", *Applied Thermal Engineering* 144, pp. 960-971.
- [23] Yuanxu Li, Zhi Ning, Chia-fon F. Lee, Junhao Yan, Timothy H. Lee, 2018, "Effect of Acetone-Butanol-Ethanol (ABE)-gasoline blends on regulated and unregulated emission in spark-ignition engine", *Energy*.
- [24] Hazim Sharudin, Nik Rosli Abdullah, G. Najafi, Rizalman Mamat, H.H. Masjuki, 2107, "Investigation of the effects of iso-butanol additives on spark ignition engine fuelled with methanol-gasoline blends, *Applied Thermal Engineering* 114, pp. 593-600
- [25] Yuqiang Li, Karthik Nithyanandan, Timothy H. Lee, Robert Michael Donahue, Yilu Lin, Chia-Fon Lee, Shengming Liao, 2016, "Effect of water-containing acetone-butanol-ethanol gasoline blends on combustion, performance, and emissions characteristics of a spark-ignition engine", *Energy Conversion and Management* 117, pp. 1-30.
- [26] Cinzia Tomatore, Fabio Bozza, Vincenzo De Bellis, Luigi Teodosio, Gerardo Valentino, Luca Marchitto, 2019, "Experimental and numerical study on the influence of cooled EGR on knock tendency, performance and emissions of a downsized sparkignition engine", *Energy* 172, pp. 968-976.
- [27] Prakhhar Chansauria, R. K. Mandloi, 2018, "Effects of Ethanol Blends on Performance of Spark Ignition Engine-A Review", *Materials Today: Proceedings* 5, pp. 4066-4077.
- [28] E. Galloni, G. Fontana, R. Palmaccio., 2013, "Effect of exhaust gas recycle in a downsized gasoline engine", *Applied Energy*, volume 105, pp. 99-107.